



CUMMINS INC.
 Charleston, SC 29405
 Marine Performance Curves
marine.cummins.com

Basic Engine Model
QSB 6.7

Curve Number:
M-93858

Engine Configuration
D313011MX03

CPL Code:
3887

Date:
8-May-13

Displacement: **6.7 liter [408 in³]**
 Bore: **107 mm [4.21 in]**
 Stroke: **124 mm [4.88 in]**
 Cylinders: **6**
 Fuel System: **HPCR Bosch CRIN 3.0**


Rated Power: **184 kw [247bhp, 250mhp]**
 Rated Speed: **2600 rpm**
 Rating Type: **High Output**
 Aspiration: **Turbocharged / Sea Water Aftercooled**

CERTIFIED: This diesel engine complies with or is certified to the following agencies requirements:

EPA Tier 3 - Model year requirements of the EPA marine regulation (40CFR1042)

IMO Tier II (Two) NOx requirements of International Maritime Organization (IMO), MARPOL 73/78 Annex VI, Regulation 13

RCD - meets the requirements of the Recreational Craft Directive 94/25/EC as amended by 2003/44/EC in accordance with ISO 8178-1

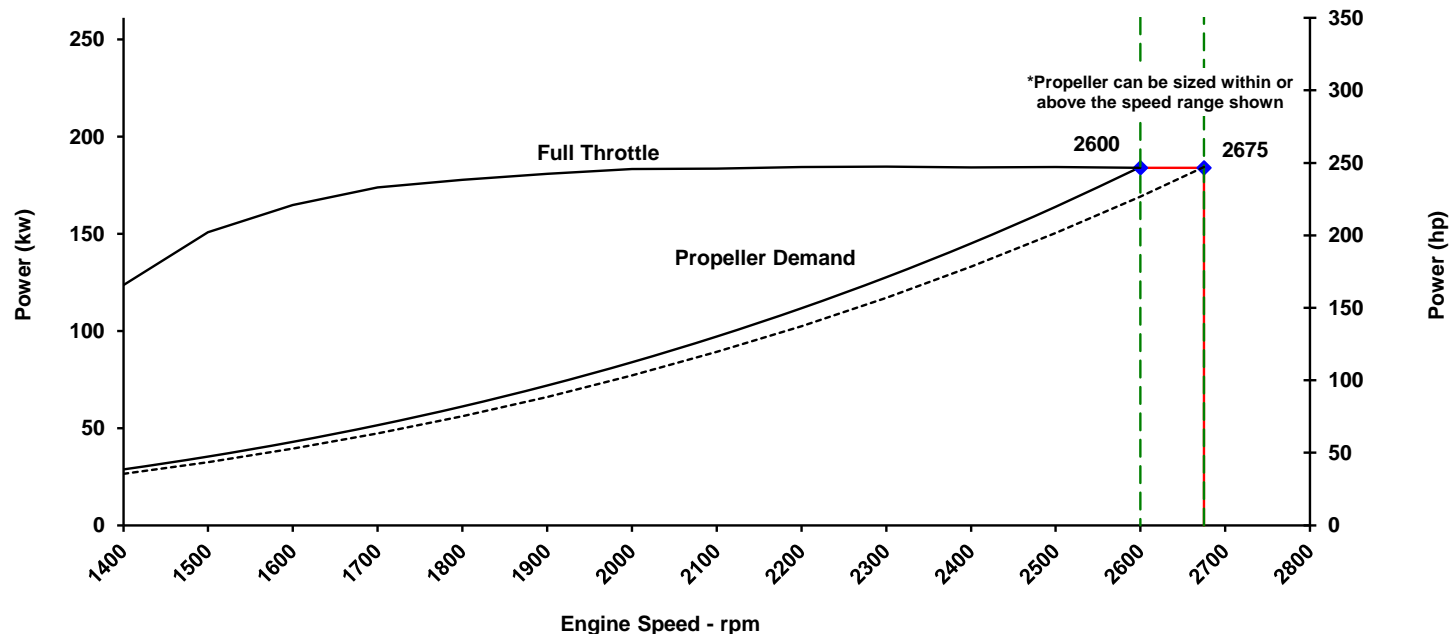

Speed	Full Throttle				Propeller Demand				
	Power		Torque		Power		Torque		Fuel Consumption
	kw	(hp)	N-m	(ft-lb)	kw	(hp)	N-m	(ft-lb)	L/hr (gal/hr)
rpm	kw	(hp)	N-m	(ft-lb)	kw	(hp)	N-m	(ft-lb)	L/hr (gal/hr)
2675	184	(247)	656	(484)					
2600	184	(247)	675	(498)	184	(247.0)	676	(498.9)	46.9 (12.4)
2500	184	(247)	704	(519)	166	(222.2)	633	(466.8)	43.1 (11.4)
2400	184	(247)	732	(540)	148	(199.0)	590	(435.5)	38.4 (10.1)
2300	185	(247)	766	(565)	132	(177.4)	549	(405.1)	34.1 (9.0)
2200	184	(247)	800	(590)	117	(157.3)	509	(375.6)	30.1 (8.0)
2100	183	(246)	834	(615)	103	(138.8)	471	(347.0)	26.8 (7.1)
2000	183	(246)	874	(645)	91	(121.6)	433	(319.4)	23.3 (6.2)
1900	181	(242)	908	(670)	79	(105.9)	397	(292.7)	20.1 (5.3)
1800	178	(238)	942	(695)	68	(91.5)	362	(267.0)	17.5 (4.6)
1700	174	(233)	976	(720)	58	(78.4)	329	(242.3)	15.4 (4.1)
1600	165	(221)	983	(725)	50	(66.6)	296	(218.6)	13.2 (3.5)
1500	151	(202)	960	(708)	42	(55.9)	266	(195.9)	10.8 (2.9)
1400	124	(166)	843	(622)	35	(46.4)	236	(174.2)	8.9 (2.4)
1300	107	(144)	786	(580)	28	(38.0)	208	(153.6)	7.5 (2.0)
1200	92	(124)	733	(541)	23	(30.6)	182	(134.0)	6.2 (1.6)
1100	78	(105)	678	(500)	18	(24.2)	157	(115.6)	5.0 (1.3)
1000	65	(87)	620	(457)	14	(18.7)	133	(98.3)	4.1 (1.1)
900	55	(73)	580	(428)	11	(14.1)	111	(82.2)	3.2 (0.9)
800	45	(61)	541	(399)	8	(10.2)	91	(67.3)	2.5 (0.7)
700	38	(51)	521	(384)	5	(7.1)	73	(53.6)	1.9 (0.5)
600	31	(42)	500	(369)	4	(4.7)	56	(41.3)	1.4 (0.4)

*** Cummins Full Throttle Requirements:**

- Engine achieves or exceeds rated rpm at full throttle under any steady operating condition
- Engines in variable displacement boats (such as pushboats, tugboats, net draggers, etc.) achieve no less than 100 rpm below rated speed at full throttle during a dead push or bollard pull
- Engine achieves or exceeds rated rpm when accelerating from idle to full throttle

Rated Conditions: Ratings are based upon ISO 15550 reference conditions; air pressure of 100 kPa [29.612 in Hg], air temperature 25deg. C [77 deg. F] and 30% relative humidity. Member NMMA. Unless otherwise specified, tolerance on all values is +/-5%. Values from engine control modules and displayed on instrument panels are not absolute. Tolerance varies, but is generally less than +/-5% when operating within 30% of rated power.

Full Throttle curve represents power at the crankshaft for mature gross engine performance corrected in accordance with ISO 15550. Propeller Curve represents approximate power demand from a typical propeller. Propeller Shaft Power is approximately 3% less than rated crankshaft power after typical reverse/reduction gear losses and may vary depending on the type of gear or propulsion system used.

Fuel Consumption is based on fuel of 35 deg. API gravity at 16 deg C [60 deg. F] having LHV of 42,780 kJ/kg [18390 Btu/lb] and weighing 838.9 g/liter [7.001 lb/U.S. gal].

High Output (HO): Intended for use in variable load applications where full power is limited to one hour out of every eight hours of operation. Also, reduced power must be at or below 200 rpm of the maximum rated rpm. This power rating is for pleasure/non-revenue generating applications that operate 500 hours per year or less.

[Signature]

Propulsion Marine Engine Performance Data

Curve No. M-93858
DS: D31-MX-2
CPL: 3887
DATE: 8-May-13

General Engine Data

Engine Model	QSB 6.7
Rating Type	High Output
Rated Engine Power	184 [247]
Rated Engine Speed	2600
Rated Power Production Tolerance	5
Rated Engine Torque	676 [499]
Peak Engine Torque @ 1600 rpm.....	983 [725]
Brake Mean Effective Pressure	1271 [184]
Indicated Mean Effective Pressure.....	1271 [184]
Maximum Allowable Engine Speed	2675

Maximum Continuous Torque Capacity from Front of Crank Specifications

Maximum Torque Capacity from Front of Crank ²	677 [499]
Compression Ratio	16.5:1
Piston Speed	10.7 [2115]
Firing Order	1-5-3-6-2-4
Weight (Dry) - Engine With Heat Exchanger System - Average.....	662 [1460]

Governor Settings

Default Droop Value.....	Refer to MAB 2.04.00-03/23/2006 for Droop explanation	0%
High Speed Governor Break Point.....		2675
Minimum Idle Speed Setting		550
Normal Idle Speed Variation		10
High Idle Speed Range Minimum		2670
Maximum		2680

Noise and Vibration

Average Noise Level - Top	(Idle).....	dBA @ 1m	75
	(Rated)	dBA @ 1m	100
Average Noise Level - Right Side	(Idle).....	dBA @ 1m	75
	(Rated)	dBA @ 1m	100
Average Noise Level - Left Side	(Idle).....	dBA @ 1m	76
	(Rated)	dBA @ 1m	102
Average Noise Level - Front	(Idle).....	dBA @ 1m	76
	(Rated)	dBA @ 1m	101

Fuel System¹

Avg. Fuel Consumption - ISO 8178 E3 Standard Test Cycle	33.0 [8.7]
Avg. Fuel Consumption - ISO 8178 E5 Standard Test Cycle	16.8 [4.4]
Fuel Consumption at Rated Speed	46.9 [12.4]
Approximate Fuel Flow to Pump	215.8 [57.0]
Maximum Allowable Fuel Supply to Pump Temperature	60.0 [140]
Approximate Fuel Flow Return to Tank	168.8 [44.6]
Approximate Fuel Return to Tank Temperature	62.8 [145]
Maximum Heat Rejection to Drain Fuel	2.0 [112]

TBD= To Be Determined

N/A = Not Applicable

N.A. = Not Available

¹ Unless otherwise specified, all data is at rated power conditions and can vary ± 5%.

² No rear loads can be applied when the FPTO is fully loaded. Max PTO torque is contingent on torsional analysis results for the specific drive system. Consult Installation Direction Booklet for Limitations.

³ Heat rejection to coolant values are based on 50% water/50% ethylene glycol mix and do NOT include fouling factors. If sourcing your own cooler, a service fouling factor should be applied according to the cooler manufacturer's recommendation.

⁴ Consult option notes for flow specifications of optional Cummins seawater pumps, if applicable.

CUMMINS INC.

COLUMBUS, INDIANA

All Data is Subject to Change Without Notice - Consult the following Cummins website for the most recent data:

<http://marine.cummins.com>

Propulsion Marine Engine Performance Data

Curve No. M-93858
DS: D31-MX-2
CPL: 3887
DATE: 8-May-13

Air System¹

Intake Manifold PressurekPa [in Hg]	112 [33]
Intake Air Flowl/sec [cfm]	255 [540]
Heat Rejection to AmbientkW [Btu/min]	14 [798]

Exhaust System¹

Exhaust Gas Flowl/sec [cfm]	550 [1,165]
Exhaust Gas Temperature (Turbine Out)°C [°F]	421 [790]
Exhaust Gas Temperature (Manifold)°C [°F]	545 [1,012]

Emissions (in accordance with ISO 8178 Cycle E3)

NO _x (Oxides of Nitrogen)g/kw-hr [g/hp-hr]	4.53 [3.38]
HC (Hydrocarbons)g/kw-hr [g/hp-hr]	0.20 [0.15]
CO (Carbon Monoxide)g/kw-hr [g/hp-hr]	0.63 [0.47]
PM (Particulate Matter)g/kw-hr [g/hp-hr]	0.08 [0.06]
CO ₂ (Carbon dioxide)g/kw-hr [g/hp-hr]	701.00 [522.74]

Emissions (in accordance with ISO 8178 Cycle E5)

NO _x (Oxides of Nitrogen)g/kw-hr [g/hp-hr]	4.70 [3.50]
HC (Hydrocarbons)g/kw-hr [g/hp-hr]	0.13 [0.10]
CO (Carbon Monoxide)g/kw-hr [g/hp-hr]	0.91 [0.68]
PM (Particulate Matter)g/kw-hr [g/hp-hr]	0.08 [0.06]
CO ₂ (Carbon dioxide)g/kw-hr [g/hp-hr]	761.00 [567.48]

Cooling System¹

Sea Water Pump SpecificationsMAB 0.08.17-07/16/2001	
Pressure Cap RatingkPa [psi]	103 [15]
Max. Coolant Outlet Pressure from the Engine.....kPa [psi]	414 [60]

TBD= To Be Determined

N/A = Not Applicable

N.A. = Not Available

- ¹ Unless otherwise specified, all data is at rated power conditions and can vary ± 5%.
- ² No rear loads can be applied when the FPTO is fully loaded. Max PTO torque is contingent on torsional analysis results for the specific drive system. Consult Installation Direction Booklet for Limitations.
- ³ Heat rejection to coolant values are based on 50% water/50% ethylene glycol mix and do NOT include fouling factors. If sourcing your own cooler, a service fouling factor should be applied according to the cooler manufacturer's recommendation.
- ⁴ Consult option notes for flow specifications of optional Cummins seawater pumps, if applicable.

CUMMINS INC.
COLUMBUS, INDIANA

All Data is Subject to Change Without Notice - Consult the following Cummins website for the most recent data:

<http://marine.cummins.com>